

**2321-0018**  
**VICTORY VEGAS 2004**  
**MEMPHIS FATS/SLIMS MOUNTING INSTRUCTIONS AND PARTS LIST**

**TOOLS REQUIRED: 3/16" ALLEN WRENCH (PROVIDED)**  
**7/16" (OR 11MM) WRENCH**

1. Loosely install the two mounting plates on the windshield, using the bottom and third bolt up. Leave the nylon washers off. The small tab goes at the bottom, big one at the top. (See Figure 1-for reference only VEGAS plate is not shown)

**Install Note:** Tabs point, in towards each other when installed correctly.


**WARNING**

If the adjustable clamps are installed backwards, it may result in serious gas tank damage. Always check for proper gas tank clearance before tightening hardware.

2. Loosely install the four fork clamps, approximately 1 3/4 inches apart. (See Figure 2)
3. Loosen the four bolts that are to hold the windshield to the fork clamps, and slide the mounting plates onto the forks. (See Figure 3)
4. Adjust the height, angle, and alignment of the shield and tighten down the bolts that hold the windshield to the plates, then the bolts that hold the plates to the fork clamps, then the clamps themselves.

**WARNING:** This is a quick change kit. ALWAYS tighten down all mounting bolts after removing or installing the windshield, every time.


**Fig. 1 Mounting plate to w/s**

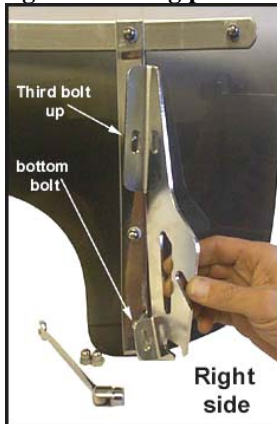

**Fig. 2 Fork clamps**



**Fig. 3 plate to forks**

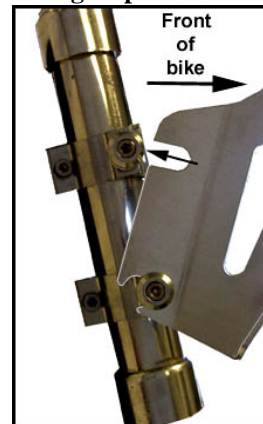

**Care and Cleaning Instructions**

To clean your windshield, use only warm water and a mild non-abrasive, dishwashing liquid. Use a soft cloth, such as a T-shirt or flannel cloth. To protect your windshield, please use Novus #2 to remove minor scratches, or use a polish like Memphis Shades Shinola which is specially designed for plastic windshields; glass cleansing agents will cause severe damage to your windshield and will void your warranty.

Never use any glass products, petroleum based chemicals, or cleaning agents with ammonia, bleach or any harsh chemicals. This includes Rain-X, brake fluid, acetone, and gasoline.

**2321-0018 MOUNTING KIT  
MEMPHIS FATS/SLIMS VICTORY VEGAS**

<b>PART #</b>	<b>DESCRIPTION</b>	<b>QTY.</b>
<b>M8953</b>	<b>MOUNTING INSTRUCTIONS/PARTS LIST</b>	<b>1</b>
<b>M1059</b>	<b>LEFT VEGAS MOUNTING PLATE</b>	<b>1</b>
<b>M1060</b>	<b>RIGHT VEGAS MOUNTING PLATE</b>	<b>1</b>
<b>M306</b>	<b>1/4" - 20 X 5/8" SS SOCKET HEAD CAP SCREW</b>	<b>4</b>
<b>M577</b>	<b>MED. INNER ADJ. FORK CLAMP</b>	<b>4</b>
<b>M578</b>	<b>MED. OUTER ADJ. FORM CLAMP</b>	<b>4</b>
<b>M501</b>	<b>BEVELED SOCKET WASHER</b>	<b>4</b>
<b>M301</b>	<b>1/4" - 20 x 3/8" SS. SOCKET HEAD CAP SCREW</b>	<b>4</b>
<b>M310</b>	<b>3/16" SHORT ARM ALLEN WRENCH</b>	<b>1</b>
<b>M313</b>	<b>3/16" SHORT ARM ALLEN WRENCH COVER</b>	<b>1</b>
<b>M314</b>	<b>3/16" T-HANDLE ALLEN WRENCH</b>	<b>1</b>
<b>M337</b>	<b>3/16" T-HANDLE ALLEN WRENCH COVER</b>	<b>1</b>

Memphis Shades warrants all product components, metal and plastic,  
against defects in materials and workmanship for 24 months.

**FOR PARTS AND WARRANTY HELP, CONTACT:**

MEMPHIS SHADES  
P. O. Box 429  
Rossville, TN 38066  
(901) 853-0293

Visit us on the web at [www.memphisshades.com](http://www.memphisshades.com) or  
you can also reach us at  
[customerservice@memphisshades.com](mailto:customerservice@memphisshades.com)